


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

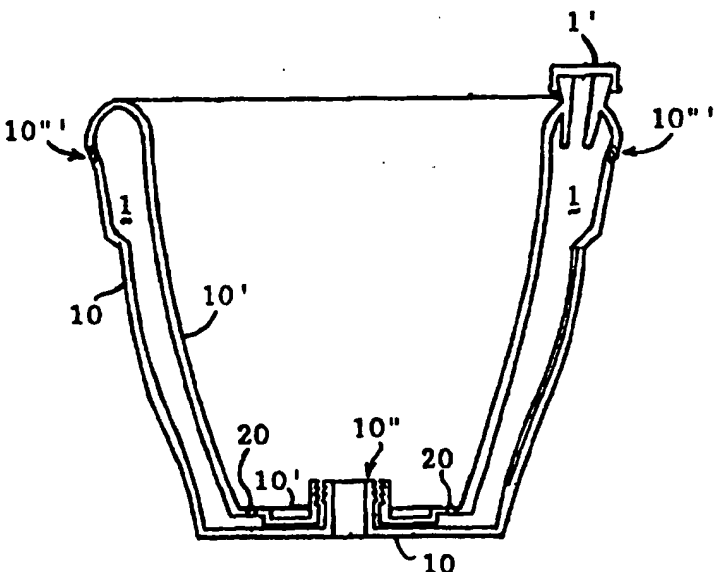

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : A01G 27/02</p>	<p>A1</p>	<p>(11) International Publication Number: WO 96/31112 (43) International Publication Date: 10 October 1996 (10.10.96)</p>
<p>(21) International Application Number: PCT/IT96/00060 (22) International Filing Date: 26 March 1996 (26.03.96) (30) Priority Data: PE95A000012 7 April 1995 (07.04.95) IT (71)(72) Applicant and Inventor: CACCIATORE, Benito [IT/IT]; Via Brandizio, 12, I-65100 Pescara (IT). (74) Agent: GRISTINA, Giorgio; Studio Giorgio Gristina, Via delle Quattro Fontane, 29, I-00184 Roma (IT).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>
<p>(54) Title: A SELF-IRRIGATING POT</p> <p>(57) Abstract</p> <p>A self-irrigating pot characterized by being equipped with a tank for water and air, built in or built out of the pot itself, which automatically irrigates the pot itself by the pressure-depressure caused by the expansion/contraction of the air and the tank itself by effect of the temperature variation.</p> 		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LJ	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Larvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

- 1 -

DescriptionA Self-Irrigating PotTechnical Field

The present invention relates to the field of
5 the irrigation of plants, such as for instance for
nurseries and for domestic plants.

More specifically, the present invention
relates to a pot fitted with a self-irrigation system.

Background of the Invention

10 It is known that the cultivation of plants in
a pot requires a frequent watering of the same, which is
a problem of time engagement for instance for
housewives.

Systems are in use at the present day that
15 allow the automatic irrigation, realized electrically or
electronically or that exploit the pressure of water
itself. However, systems are dealt with external to the
pot, which require a substantial energy consumption and
anyhow cannot dispense with a human outer almost daily
20 maintenance.

Such present day self-irrigation systems
besides a high technological content, which requires
skilled personnel, need for high initial capital
investments and for high management expenses, all to
25 damage for the medium-small nursery and of the domestic
use, without taking the already mentioned maintenance
expenses, intended as work force, drive force, into
account.

The present invention has the object to
30 provide a self-irrigating pot that overcomes the
drawbacks of the present day self-irrigation systems.

SUBSTITUTE SHEET (RULE 26)

- 2 -

To this object to produce the self-watering of pot cultivations, the pressure-depressure caused by the temperature variation between night and day is exploited.

5 The finding of the present invention, contrarily to the pots existing at the present day, which in their various shapes serve anyhow exclusively as containers for mould and the cultivation, has the peculiar feature of being a container and a completely
10 automatic irrigation system at a time, exploiting the pressure-depressure caused by the expansion/contraction of the air and the tank itself by effect of the temperature variation.

 Therefore, the subject of the present
15 invention is a self-irrigating pot characterized by being equipped with a tank for water and air, built in or built out of the pot itself, which automatically irrigates the pot itself by the pressure-depressure caused by the expansion/contraction of the air and the
20 tank itself by effect of the temperature variation.

 Preferred embodiments of the invention are set forth in the subclaims.

 The pot according to the present invention turns out to be completely autonomous, in the sense that
25 the only necessary care to be taken is that of the filling of the tank each fifteenth-forty-fifth day, proportionally to the thermal change.

 The advantages of the pot of the present invention are that the irrigation of the pot is
30 substantially reduced, reducing to a minimum the risk of making a plant to die for a lack of water; that the

SUBSTITUTE SHEET (RULE 26)

- 3 -

irrigation takes place in the first hours of the morning at an ideal temperature; that the roots of the plant are not at direct contact with the outer wall of the pot so as not to undergo temperature changes; that in adverse
5 atmospheric conditions (rain and cold) the pot doesn't release water to the plant; that the water quantity is decided by the pot proportionally to the thermal change of the environment; that the pot can be constructed for irrigation quantities in proportion to the types of
10 cultivation that one wants to execute; that it is possible to irrigate with treated or manured water; that in the nursery cultivation stage it is possible to feed the pots directly from the existing net eliminating the problems of the drop plants; that the temperature of the
15 irrigation water is equal or slightly higher than the temperature of the roots; that the level of the water can be controlled from outside so as to be able to programme the eventual filling, and that the greater the temperature, the greater the evaporation, with a fresh
20 effect for the plant.

The present invention will be understood at the best based upon the following disclosure of its preferred embodiment, given only as a matter of example, absolutely not of restriction, with reference to the
25 annexed drawings, wherein:

- FIGURE 1 is longitudinal section view, and
- FIGURE 2 is a top plant view of a pot according to the present invention.

As illustrated in the FIGURES, a pot according
30 to the teaching of the present invention has the side and bottom wall, made up as an air space 1. Such an air

SUBSTITUTE SHEET (RULE 26)

- 4 -

space can be put into connection with the outside through a tight seal plug 1'.

According to an execution, the pot is realized through the connection of an outer wall member 10 and an inner wall member 10' on the bottom through a locking device 10", laterally through welding or hermetic seal joint 10'''.

On the inner wall on the bottom of the pot capillary through holes 20, having a diameter of $\frac{1}{2}$ -1,2 mm, which connect the water tank made up of the air space 1 with the inner concavity of the pot; these holes make up as many channels for the automatic irrigation, that is to say the self-irrigation of the mould.

Such capillary channels are provided with a slant to the top to prevent the water from exiting continuously.

In the air space 1 besides water there will be an air bubble. This one expands any time the temperature rises, while contracts itself any time the temperature decreases.

The water output will be restricted by the fact that the irrigation channels 20 are slanting to the top, whereby the drops to exit have to overcome the force of gravity. This will be only possible in the hours of the day, when the inner temperature of the air space is such as to increase the pressure exerted by the air on the liquid. In the night, on the contrary, the irrigation is not possible in that the reduced temperature will cause the contraction of the air, decreasing the pressure, so as to prevent the irrigation. In the meanwhile, such a concentration of

SUBSTITUTE SHEET (RULE 26)

- 5 -

the air will allow an air sucking equal to the volume of the liquid got out in the preceding day.

So there will be watering only when it is necessary, that is when the high temperature on a side makes thirsty the plants and on the other side will increase the pressure of air allowing the reexiting of the water itself.

The present invention has been disclosed and depicted with reference to a specific embodiment thereof, but it is to be expressly understood that variations, additions and/or omissions can be made, without so departing from the original presented teaching, the protection scope whereof is only defined by the appended claims.

For instance, as a fluid communication means between the air space and the inside of the pot capillary through holes have been described. Anyhow, they could be substituted in their functionality by a permeable wall on the bottom fit for the passage of water for its delivering to the mould and of air for its drawing, as a function of temperature.

- 6 -

Claims

1. A self-irrigating pot characterized by being equipped with a tank for water and air, built in or built out of the pot itself, which automatically
5 irrigates the pot itself by the pressure-depressure caused by the expansion/contraction of the air and the tank itself by effect of the temperature variation.
2. A self-irrigating pot according to claim 1 wherein the lateral and bottom wall is made up with an
10 air space (1), making up said tank, and comprising means for communicating water and air (20) between said air space and the inside of the pot itself.
3. A self-irrigating pot according to claim 2, wherein said means for communicating water and air are
15 made up of holes (20) arranged at the bottom.
4. A self-irrigating pot according to claim 2, wherein said means for communicating water and air are integrated in the wall toward the inside of the pot of
said air space, by being this wall fabricated in a
20 permeable material on the bottom.

SUBSTITUTE SHEET (RULE 26)

1/1

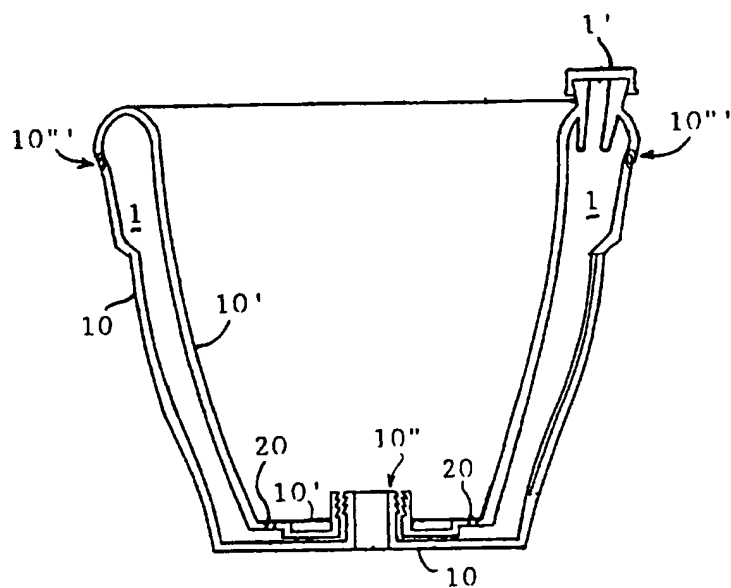


FIG. 1

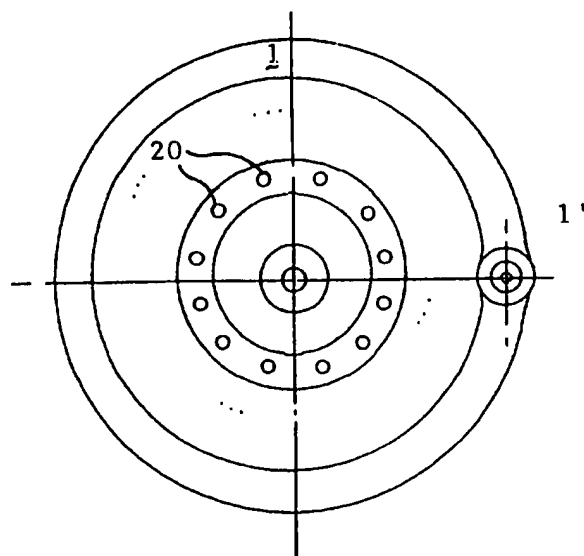


FIG. 2

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IT 96/00060

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 A01G27/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 A01G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB,A,2 250 171 (HEE) 3 June 1992 see figures 1-3; examples ---	1-4
X	CH,A,667 972 (WILD) 30 November 1988 see page 3, left-hand column, line 20 - page 4, left-hand column, line 68; figures 1-3 ---	1-3
A	---	4
X	DE,A,14 82 269 (LINDNER) 11 December 1969 see the whole document ---	1-3
X	FR,A,1 446 275 (BRASSEUR ET AL.) 7 October 1966 see the whole document ---	1-3
X	DE,B,10 45 712 (SOLEWSKI) 4 December 1958 see the whole document ---	1-3
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *&* document member of the same patent family

Date of the actual completion of the international search

2 July 1996

Date of mailing of the international search report

19. 07. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl.
Fax (+ 31-70) 340-3016

Authorized officer

Merckx, A

INTERNATIONAL SEARCH REPORT

Intern al Application No
PCT/IT 96/00060

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB,A,1 513 876 (PAULUSSEN ET AL.) 14 June 1978	1
A	see page 1, line 44 - line 84; figures -----	3

1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/IT 96/00060

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A-2250171	03-06-92	NONE	
CH-A-667972	30-11-88	AT-A,B 176686 AU-B- 6325586 CA-A- 1286883 SU-A- 1678192	15-01-94 30-04-87 30-07-91 15-09-91
DE-A-1482269	11-12-69	CH-A- 447699 DE-B- 1248359 FR-A- 1431255 GB-A- 1106222	25-05-66
FR-A-1446275	07-10-66	NONE	
DE-B-1045712		NONE	
GB-A-1513876	14-06-78	NONE	